


CEMIS 700 - ISOBUS Terminal



In addition to its ergonomic design in a sophisticated black finish with smooth, easy-to-clean surfaces, the ISOBUS terminal is particularly recognizable for its features, including 10 backlit ISOBUS hard keys and a rotary/push button. The high-contrast color display with touch functionality offers a 7-inch screen diagonal and automatic day/night switching.

Thanks to the camera input, real-time images from up to two cameras can be displayed, which can be switched at the touch of a button or automatically. This allows the operator to always have an overview of key functions of the implement or the area behind the machine.

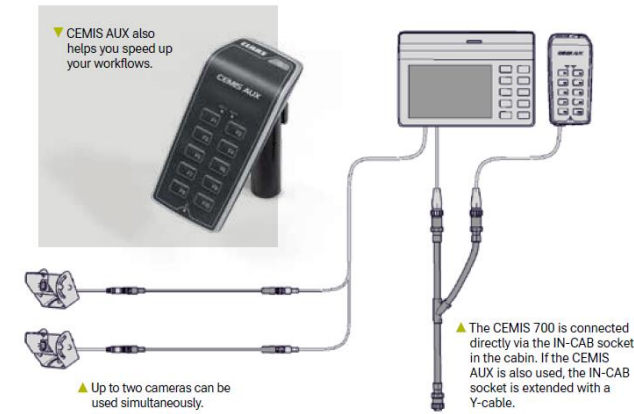

Technical Details

Dimensions	Width	Depth	Display	FSTN
	245mm	53mm		Monochrome positive transfective
Operating temperature	Min -20° C	Max +60° C	Operating voltage	10 – 16 V
Storage temperature	Min -30° C	Max +80° C	Current consumption	240 mA
			Weight	395g
Display resolution (Pixels)	Width	Height	Display diagonal	176 mm
	320	240		

Advantages

- 7-inch touchscreen
- High-contrast color display
- Operation is possible via other ISOBUS universal terminals or the tractor's ISOBUS terminal
- Two videos can be displayed via the camera input
- ISO 11783 compatibility certified by the Agricultural Industry Electronics Foundation (AEF)
- Aux-O and Aux-N as well as UT1 and UT2 functions
- Protection class IP 65